

KEN BEDPAN WASHER DISINFECTOR 733

# Intelligent Disinfection

- CLEAN, LEAN & GREEN

- ✓ Icons on display
- ✓ Total disinfecting system
- ✓ Easy to service access
- ✓ Complies with 15883

BWD 733 has been developed for small clinics, hospital and isolation wards, and with its compact design it has a large capacity with a small footprint.

The BWD 733 is easy to operate by touch panel with icons showing all relevant information of the program needed by the operators.

The free standing model that is the perfect choice for a busy ward or the optional versions that can process urine bags or suction bags.


The different bedpan holders are suitable for all types of bedpan. The capacity of BWD 733 is one bedpan and two urinal bottles per cycle. Most holders will be able to hold various commodes and urine measuring glasses.

A special utensils basket is available for washing kidney bowls, wash bassins and other small items.

All data from the BWD 733 are fully exchangeable with common computer systems.



# HEALTHCARE

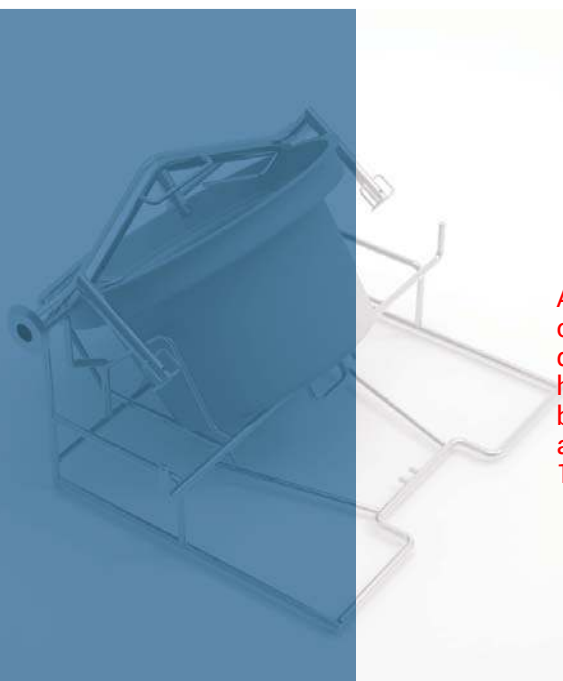

All KEN machines conform to present EU directives, and all the hospital machines have been constructed in accordance with EN ISO 15883.

## Advantages:

- Easy to use icons
- 5 standard programs - with options for 3 more
- Total disinfection guarantee
- Quick-start - automatic closing of door and automatic programme start
- Door suitable as slopsink - bedpan emptied automatically
- Service access from the front / top

## Hygiene safety

- EN 62366 tested
- EN ISO 15883-1-2-5

## Environment

- Low energy costs
- Low noise level
- Low chemical usage

Technical description	Values
<b>Outer dimensions / +plinth</b>	H: 1280 x W: 600 x D: 610 mm
<b>Operative chamber dimensions</b>	H: 520 x W: 500 x D: 330 mm
<b>Weight excl./incl. packaging</b>	89 kg / + plinth 107 kg
<b>Built in combitank</b>	10 L
<b>Built in detergent cabinet</b>	2 x 5 L
<b>Capacity bedpan / urinal bottles / bowls</b>	1 pcs + 2 pcs / 1 pcs at a time
<b>Cycle time, hot water connection</b>	7 min.
<b>Sealing class</b>	IP 21
<b>Water connections</b>	2 x 3/4
<b>Cold water</b>	200-800kPa, ≥15L7min, 5-30°, 0-3° dH
<b>Hot water</b>	200-800kPa, ≥15L7min, 30-70°, 0-3° dH
<b>Sound pressure ISO 11204 L</b>	45 dB(A)
<b>Water consumption per phase</b>	See technical manual
<b>Power supply options</b>	3x200-415 V- 50/60 Hz
<b>Heating elements in combitank</b>	2x3 kW/3x3 kW
<b>Programs available</b>	5 standard + 3 optional
<b>Drain</b>	ø90 mm

Contact a KEN partner

Clean, Lean & Green