

KEN WASHER DISINFECTOR IQ5M

# Intelligent Quality

- The Future of Efficient Disinfection

- ✓ Easy to use
- ✓ Easy to service
- ✓ Easy to choose

The IQ5M is a 12 DIN Washer Disinfector with manual door.

The IQ5M meets all relevant standards such as ISO 15883, UL to name a few.

The elegant design provides a smooth surface in tempered glass that is easy to clean. The IQ5M has manual doors that allows for loading directly at the door. Using the door as loading ramp makes it easy to use in the hospitals and laboratories.

The IQ is easy to operate by touch panel with swipe function, showing all relevant information of the program needed by the operators.


IQ5 has the lowest energy and water consumption in the market, that keep operating costs at a minimum and contribute to a clean environment. The IQ5 is equally low in operating costs.

IQ5 is suited for flexible 5 or 6 level trolleys and can hold up to 12 DIN baskets. There are many more options for other racks and modules.

All data from the IQ5 are fully exchangeable with common computer systems.



# HEALTHCARE

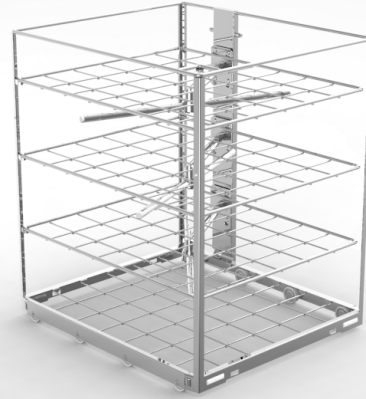

The IQ series is available with a lot racks, modules and distributors.  
Contact your dealer or look at our web page for equipment and catalogues.

## Advantages:

### Environment

- Low energy costs
- Low noise level
- Low chemical usage
- Very low water consumption

### Technology

- RFID recognition
- Intuitive smart display PCTP as option
- Drop down door serves as loading platform
- Service access from the front

### Hygiene safety

- EN 62366 tested
- EN ISO 15883-1-2-5
- Glass surfaces easy to clean

### Validation of all processes

- Open programs structure
- Full process validation
- Exchange of data
- Printer

Description	Values
Outer dimensions	H: 1985 x W: 662 x D: 712 mm
Operative chamber dimensions	H: 690 x W: 550 x D: 610 mm
Weight excl./incl. packaging	236 / 316 kg
Operative volume, wash chamber	231 L
Total volume, wash chamber	279 L
Capacity, baskets	12 DIN-baskets 480x250x50 mm 5 SPRI-baskets 450x340x70 mm
Cycle time, standard	35-45 min
Exhaust connections	ø100 mm 250 m³/h
Water connections	2 x 3/4" (3rd is optional)
Cold water	200-800 kPa, ≥ 15 L/min, 5-30°C, 0-30° dH
Hot water	200-800 kPa, ≥ 15 L/min, 30-70°C, 0-3° dH
DeminerIALIZED / RO water	200-800 kPa, ≥ 15 L/min, 5-70°C, Conductivity 3-200 µS
Washing / Drying	<53 dB (A) / <55 dB (A)
Water consumption per phase	Approx. 12-15 L (with standard 5-level rack)
Power supply options	3x200-480V AC + N + PE, 50/60 Hz 7-13 kW
Programs available	10 standard + 30 optional
Drain	ø50 mm, min flow requirements: 115 L/min

Contact a KEN partner

KEN HYGIENE SYSTEMS A/S  
Bøgebjergvej 60 · DK-5672 Broby  
T +45 6263 1091 · F +45 6263 1607  
ken@ken.dk · www.ken.dk

Clean, Lean & Green

