


primus®

GET AHEAD IN LAUNDRY+



## PC20 | PC30 | PC40 | PC60 HARDMOUNT WASHER-EXTRACTORS

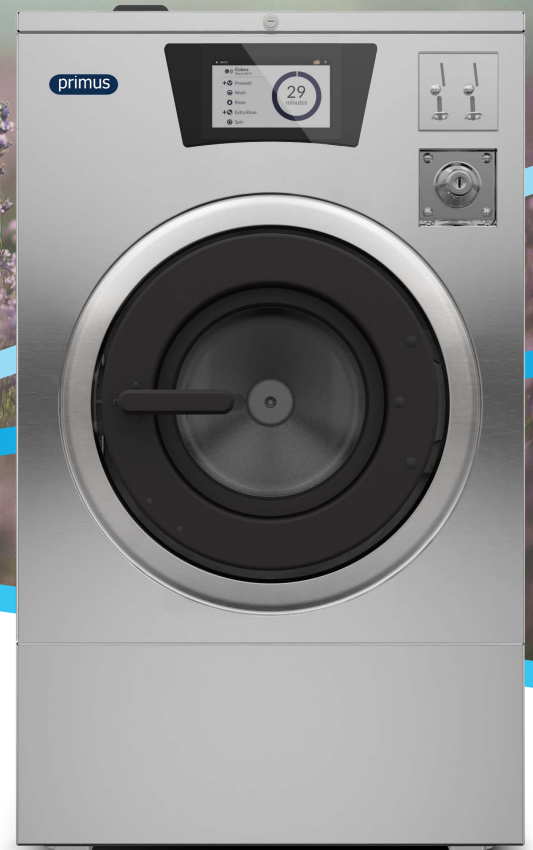

**PATENTED WATER GUARDIAN**  
Detects leaking valves



**EXTRA LARGE DOOR OPENING**  
For easy loading and unloading



**IMPROVED DURABILITY**  
for your peace of mind with a  
3-year warranty


### FEATURES & BENEFITS

#### FEATURES

- Rigid mounted, normal spin, 200G factor
- Stainless Steel drum and tub
- High capacity water inlets
- Large drain valve
- Large door opening for easy loading and unloading
- Industry-leading flexible water level settings
- patented Fill and Drain leak detection saves water
- Lighter, consumption-optimized frame
- Designed to reduce sound and vibration levels

#### PLATFORM: XCONTROL FLEX

- Available with XControl FLEX for Vend
- Full color, touch screen display
- Clear step-by-step instructions available in 34 languages
- Machine programming & performance data accessible through cloud. Remotely access to live machine data on mobile device
- VEND:
  - » 15 easy-to-use washer cycle modifier
- Count up timer
- Over-the-air updates

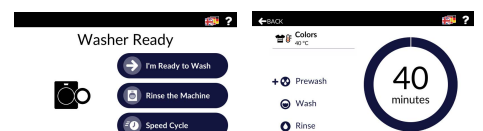

Consult your sales representative for availability

Primus by Alliance Laundry Systems


## Specifications

Model	PC20	PC30	PC40	PC60
Control Option	XControl FLEX	XControl FLEX	XControl FLEX	XControl FLEX
Capacity - [kg (lb)]	9.1 (20)	13.1 (30)	18.1 (40)	27.2 (60)
Overall Width - [mm (in)]	660 (26)	737 (29)	778 (30.6)	865 (34.1)
Overall Depth - [mm (in)]	784 (30.9)	896 (35.3)	1073 (42.3)	1135 (44.7)
Overall Height - [mm (in)]	1092 (43)	1143 (45)	1199 (47.2)	1267 (49.9)
Cylinder Diameter - [mm (in)]	533 (21)	610 (24)	668 (26.3)	762 (30)
Cylinder Depth - [mm (in)]	350 (13.8)	406 (16)	515 (20.3)	559 (22)
Cylinder Volume - [l (cu. ft.)]	79.3 (2.8)	119 (4.2)	178 (6.3)	255 (9.0)
Door Opening Size - [mm (in)]	295 (11.6)	363 (14.3)	414 (16.3)	414 (16.3)
Door Bottom to Floor - [mm (in)]	365 (14.4)	356 (14)	370 (14.6)	379 (14.9)
Water Inlet Connection - [mm (in)]	2 @ 19 (0,75)	2 @ 19 (0,75)	2 @ 19 (0,75)	4 @ 19 (0,75)
Drain Diameter - [mm (in)]	1 @ 76 (3)	1 @ 76 (3)	1 @ 76 (3)	1 @ 76 (3)
Drain Height to Floor - [mm (in)]	99 (3,9)	109 (4,3)	114 (4,5)	124 (4,9)
Total #of Speeds	9	9	9	9
CYLINDER SPEEDS - [RPM (G-FORCE)] Ultra High	819(200)	766(200)	733(200)	686(200)
VOLTAGE WIRES/ CIRCUIT BREAKER -				
FLA120/60/1	15.IX	N/A	20 - 15	N/A
200-208/220-240/50/60/3/1/3	15 - 4 (1 Ph) 15 - 3 (3 Ph)	15 - 7 (1 Ph) 15 - 4 (3 Ph)	15 - 7 (1 Ph) 15 - 4 (3 Ph)	15 - 11 (1 Ph) 15 - 7 (3 Ph)
200-208/220- 240/50/60/3/3	30 - 22	30-22	50 - 41	50 - 41
440-480/50/60/3/3	15 - 2	15 - 3	15 - 3	15 - 4
380-415/50/60/3/3	15 - 4	15 - 4	15 - 5	15 - 6
SHIPPING DIMENSIONS				
AP-PROX. - [mm (in)]				
Width	711 (28)	800 (31.5)	826 (32.5)	953 (37.5)
Depth	859 (33.8)	937 (38.3)	1105 (43.5)	1191 (46.9)
Height	1255 (49.4)	1303 (51.3)	1361 (53.6)	1430 (56.3)
Motor Power Consumption - [kW (HP)]	0.75 (1)	0.75 (1)	1.5 (2)	2.2 (3)
Net Weight - [kg (lb)]	154 (340)	200 (440)	245 (540)	308 (680)
Shipping Weight - [kg (lb)]	172 (380)	218 (480)	263 (580)	327 (720)
Slat Crate Shipping Weight - [kg (lb)]	209 (460)	263 (580)	308 (680)	381 (840)
Agency Approvals	CSA/UL/IEC/KTL	CSA/UL/IEC/KTL	CSA/UL/IEC/KTL	CSA/UL/IEC/KTL

## Hardmount Washer-Extractor

	Height	Width	Depth
PC20	1092	660	784
PC30	1143	737	896
PC40	1199	778	1073
PC60	1267	865	1135

All measurements in mm.

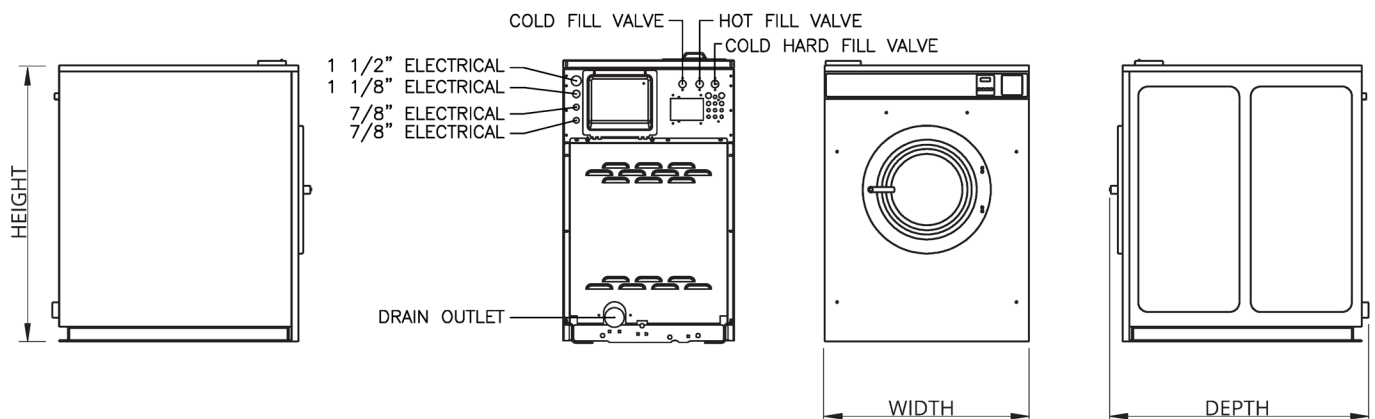

Primus preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding. [www.primuslaundry.com](http://www.primuslaundry.com)