



DC8 | DC8 HP | DC16
DRYING CABINET

DC8

DC16



LOW ENERGY CONSUMPTION
Up to 1,7 kWh/kg



SHORT DRYING TIME
Up to 42 minutes



HUMIDITY TRACKING SYSTEM
measures the level of humidity every single second, to determine exactly when the textiles are dry

FEATURES & BENEFITS

Features

- Double overheat - protection for increased security. (DC8, DC16)
- The top is removable for easier handling and installation.
- Test program and error codes make it easier for maintenance.
- Double sheet metal in sides and doors minimize loss of energy.
- Hanging frame can be rotated 90° (DC16), 180° (DC8, DC8 HP).
- Three fans (2x DC8) create perfect balance between evacuated and recirculated air.
- Service menu with possibilities to adjust the function of the cabinet.
- The doors open 190° (DC 8 HP).
- Lighting inserted (DC 8 HP).
- The feet are adjustable from the inside of the cabinet (DC 8 HP).


Options

- Heat Pump (DC8 HP)
- Hook rack, set of three
- Hanging rails
- Single bar clothes hanger


SPECIFICATIONS

TYPE		DC8	DC8 HP	DC16
Loading capacity	kg (lbs)	8(17,6)	8(17,6)	16(35,3)
Drying capacity	g/min*	62	45	81
Hanging length	m (ft)	16(52,5)	16(52,5)	32(105)
AIRFLOW	m ³ /h	340	-	550
HEAT PUMP (Drain pipe)	mm	-	Ø 26	-
NOISE LEVEL	dBA	62	56	65
ELECTRICAL HEATING				
Electrical connection		3~N/400V/50Hz	3~N/400V/50Hz	3~N/400V/50Hz
Energy	kWh	3	1,7	6,4
Total effect	kW	6,3	1,7	9,5
EXHAUST	mm	125	-	160
DIMENSIONS				
Size HxWxD	mm	1870x1200x640	1995x1200x650	1955x1800x800
Net weight	kg	145	165	235
TRANSPORT DATA				
Packed HxWxD	mm	2050x1250x700	1800x1250x700	1060x1915x790
Gross weight	kg	159	180	275

DC8

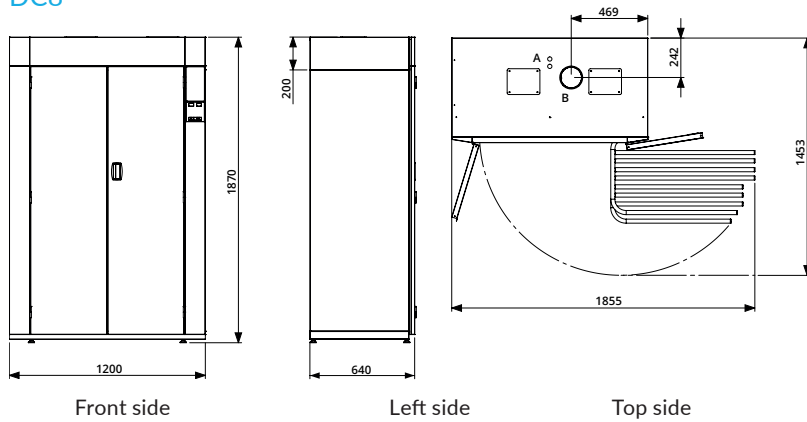

DC8 HP

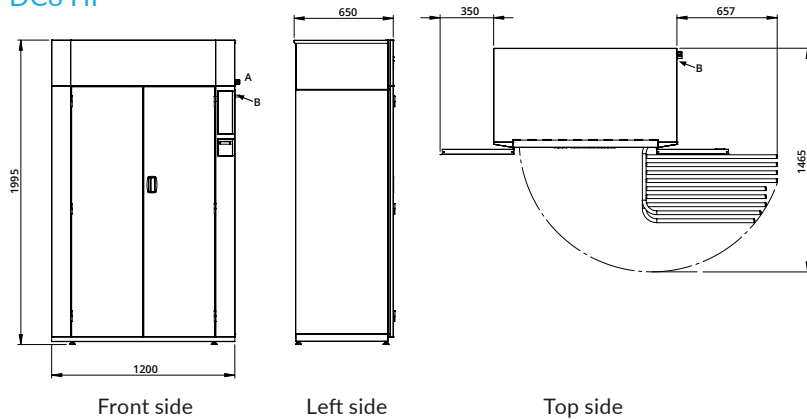

DC16

