



LOW ENERGY CONSUMPTION Up to 0,1 kWh/kg



SHORT DRYING TIME Up to 42 minutes



HUMIDITY TRACKING SYSTEM measures the level of humidity every single second, to determine exactly when the textiles are dry

FEATURES & BENEFITS

Features


- Better airflow for shorter drying times.
- Flexible construction that allows hanging bars to slide easily forward for easy access to garments or down for more space.
- Easy to install. The evacuating channel is connected to the ventilation system and the humid air is transported out of the room.
- All electrical components are placed on the top which makes it easy to maintain.
- Pull out hanging system-
- 3 temperatures: HIGH, LOW, ECO+
- Overheat protection.

SPECIFICATIONS

	DC4					
kg (lbs)	6(13,2)					
g/min*	25					
m (ft)	16(52,5)					
m³/h	95					
m³/h	184					
kW	0.038 2,0					
kW						
dBA	55					
	1N, 230V 50 - 60Hz					
kWh/kg	0,10 - 1,20					
kW	2,038					
mm	100					
mm	1900x595x610					
kg	60					
	g/min* m (ft) m³/h kW kW dBA kWh/kg kW mm	kg (lbs) 6(13,2) g/min* 25 m (ft) 16(52,5) m³/h 95 m³/h 184 kW 0.038 kW 2,0 dBA 55 IN, 230V 50 - 60Hz kWh/kg 0,10 - 1,20 kW 2,038 mm 100 mm				

DIMENSIONS

	А	В	С	D	E	F	G	Н	I.	J	К	L
DC4	595	610	1900	297	348	227	52	450	73	1674	31	39
	width	depth	height									

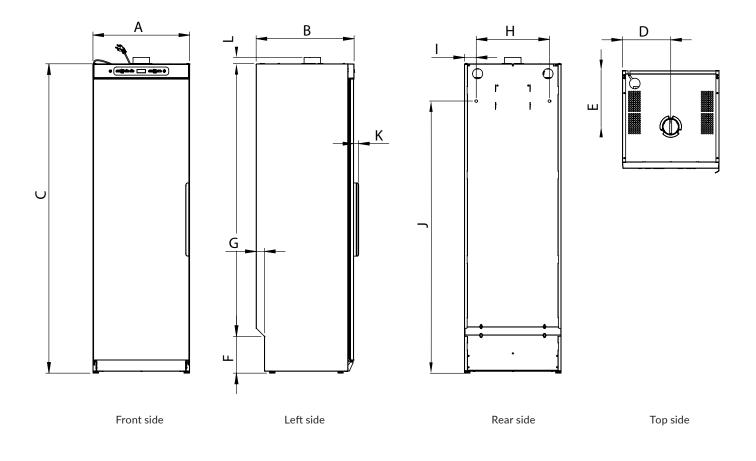

Primus preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding. www.primuslaundry.com