



DX13 | DX16 | DX24 | DX34  
TUMBLE DRYER



**SAFETECH FIRE SUPPRESSION SYSTEM**  
For maximal safety of your operations



**SENSO DRY+ TECHNOLOGY**  
Lower energy and utility costs, lower linen replacement costs



**CLOUD - BASED PLATFORM**  
to easily monitor your laundry everywhere and at any time



**RADIAL AND AXIAL AIRFLOW**  
For maximal heat transfer, low energy consumption and short drying time



**EXTRA LARGE DOOR OPENING**  
For easy loading and unloading



**IMPROVED DURABILITY**  
for your peace of mind with a 3 - year warranty

**FEATURES & BENEFITS**

**Features**

- Standard galvanized drum
- Stainless steel front panel with black painted door
- Large door opening for easy loading & unloading
- Self cleaning lint screen
- AutoDry capability for OPL

**Options**

- Coin operated
- Stainless steel drum
- Reversing drum

**Control**

- XControl FLEX PLUS – fully programmable and customizable cycles 7" touch screen.
  - User - friendly screen with operating instructions built in as part of the control
  - Complete control content available in 34 languages
- Easy - To - Use Microprocessor - Dual Digital Control or OPL Micro
- Coin Operated Easy - To - Use Microprocessor - XQ - Control (ECT)


## SPECIFICATIONS

TYPE		DX13	DX16	DX24	DX34
<b>CAPACITY</b>					
Capacity 1:18	kg (lb)	15(33)	19(43)	27(59)	35(77)
Capacity 1:22	kg (lb)	13(30)	16(35)	24(55)	29(64)
Drum volume	l	270	350	490	634
Drum diameter	mm	Ø 673	Ø 762	Ø 838	Ø 940
AIRFLOW	l/sec	240	260 - 280	330	380
<b>MOTORS</b>					
Fan	kW	0,40	0,40	0,40	0,40
Drive	kW	0,40	0,40	0,40	0,40
NOISE LEVEL	dba	59	61	61	60
<b>GAS HEATING</b>					
Gas connection	NPT	1/2"	1/2"	1/2"	1/2"
Electrical connection					
Energy	kW	16.1 - 21.4	18.8 - 26.4	30.8 - 32.8	35.8 - 48.4
	kBTU/h	55 - 73	64 - 90	105 - 112	150
<b>STEAM HEATING</b>					
Steam connection	NPT	-	-	3/4"	3/4"
Electrical connection					
Steam pressure	bar	-	-	5.5 - 8.6	5.3 - 6.9
<b>ELECTRICAL HEATING</b>					
Electrical connection					
Energy	kW	12 - 21	9 - 24	18 - 27	21 - 36
EXHAUST	mm	150	150 - 200	200	200 - 250
<b>DIMENSIONS</b>					
H×W×D	mm	1625x710x1155	1625x800x1155	1700x870x1350	1960x980x1190
Net weight	kg	150 - 155	165 - 170	195 - 210	325 - 335
<b>TRANSPORT DATA</b>					
Packed H×W×D	mm	1720x760x1240	1720x840x1240	1790x900x1450	2120x1050x1420
Gross weight	kg	165 - 170	185	210 - 215	345 - 360

## DIMENSIONS

	A	B	C	D	E	F	G*	H*	I*	J	K
DX13	670	700	720	810	1155	1625	370	405	40	625	710
DX16	710	700	720	810	1155	1625	370	435	40	695	800
DX24	810	670	850	935	1350	1700	395	510	40	775	875
							depth	height			width

\*Fire suppression system optional - may not be on machine.

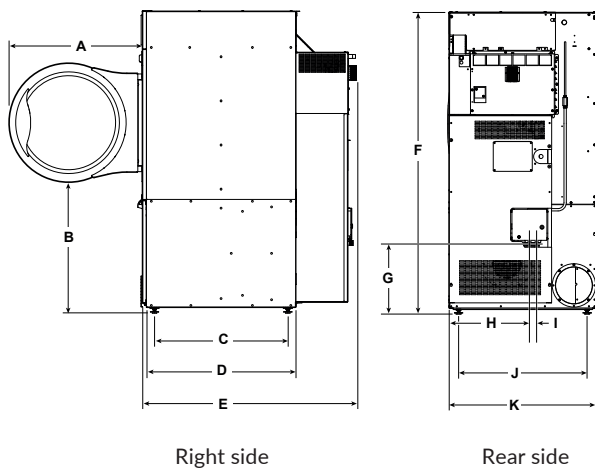

## DIMENSIONS

	A	B	C	D	E*	F	G	H*	I*	J*	K	L
DX34	740	860	1190	1960	465	980	840	190	150	350	900	1000
							depth	height				width

\*Fire suppression system optional - may not be on machine.

