



FX65 | FX80 | FX105 | FX135  
SOFTMOUNT WASHER-EXTRACTORS



**TOUCH CONTROL AVAILABLE**  
Multilingual user-friendly 7" touch control



**500G EXTRACTION SPEED**  
Less moisture for a more efficient drying process



**CLOUD-BASED PLATFORM**  
to easily monitor your laundry everywhere and at any time



**IMPROVED DURABILITY**  
for your peace of mind with a 3-year warranty



**CASCADE DRUM TECHNOLOGY**  
Extra mechanical action thanks to its cascading shape of the surface

FEATURES & BENEFITS

Features

- Stainless steel top, drum and tub and anthracite front and side panel
- Patented soap hopper
- Easy access to all vital parts from the front
- Large door opening for easy loading & unloading
- Cascade Drum - Patented drum

Options

- Coin operated
- Stainless steel cabinet
- Liquid soap connection and pumps
- Water recovery kit
- Steam heating version
- 3<sup>rd</sup> water inlet
- Double door glass Execution

Control


- XControl FLEX PLUS – fully programmable and customizable cycles 7" touch screen.
  - User-friendly screen with operating instructions built in as part of the control
  - Complete control content available in 34 languages
- XControl – fully programmable control with 20 Pre-set programs and memory up to 99.
- XTronic – Programmable control with 6 programs (+2 cycle modifiers and Imbalance detection)

## SPECIFICATIONS

| TYPE                         |            | FX65         | FX80         | FX105        | FX135        |
|------------------------------|------------|--------------|--------------|--------------|--------------|
| <b>INNERDRUM</b>             |            |              |              |              |              |
| Capacity 1:09                | kg (lb)    | 7 (15)       | 8,5 (19)     | 12 (26)      | 15 (33)      |
| Capacity 1:10                | kg (lb)    | 6,5 (14)     | 7,5 (17)     | 10,5 (23)    | 13,5 (30)    |
| Volume                       | litres     | 65           | 75           | 105          | 135          |
| Diameter                     | mm         | 530          | 530          | 620          | 620          |
| <b>DRUM SPEED</b>            |            |              |              |              |              |
| Wash                         | rpm        | 49           | 49           | 49           | 49           |
| Extraction                   | rpm        | 1298         | 1298         | 1200         | 1151         |
| G-FACTOR                     |            | 500          | 500          | 500          | 460          |
| <b>HEATING</b>               |            |              |              |              |              |
| Electricity                  | kW         | 3 - 7        | 3 - 7        | 3 - 7        | 3 - 9        |
| Steam                        | bar        | 1 - 8        | 1 - 8        | 1 - 8        | 1 - 8        |
| Sound pressure level         | dB (A)     | < 65         | < 65         | < 65         | < 65         |
| Water valves connection      | BSP        | 3/4"         | 3/4"         | 3/4"         | 3/4"         |
| Water pressure               | kPa        | 100-600      | 100-600      | 100-600      | 100-600      |
| Rec. water pressure          | kPa        | 300-500      | 300-500      | 300-500      | 300-500      |
| Water inlet                  | l/min      | 20           | 20           | 20           | 20           |
| Drain valve                  | outer Ø mm | 76           | 76           | 76           | 76           |
| Flow amount with drain valve | l/min      | 210          | 210          | 210          | 210          |
| Steam valve connection       | BSP        | 1/2"         | 1/2"         | 1/2"         | 1/2"         |
| Steam pressure               | kPa        | 100-800      | 100-800      | 100-800      | 100-800      |
| <b>DIMENSIONS</b>            |            |              |              |              |              |
| Size H×W×D                   | mm         | 1135×710×740 | 1135×710×790 | 1245×795×795 | 1245×795×945 |
| Net weight                   | kg         | 170          | 185          | 210          | 255          |
| <b>TRANSPORT DATA</b>        |            |              |              |              |              |
| Packed H×W×D                 | mm         | 1245×750×840 | 1245×750×840 | 1345×835×840 | 1345×835×985 |
| Gross weight                 | kg         | 180          | 200          | 235          | 275          |

## DIMENSIONS

|       | A     | B   | C   | D      | E   | F    | G     | H  | I   | J   | K    | L    | M    | N   | O  | P   | Q   | S  | T    | U  | V   | W   | X   | Y   |
|-------|-------|-----|-----|--------|-----|------|-------|----|-----|-----|------|------|------|-----|----|-----|-----|----|------|----|-----|-----|-----|-----|
| FX65  | 612   | 564 | 710 | 24     | 349 | 1135 | 180   | 48 | 740 | 676 | 1030 | 1030 | 940  | 480 | 88 | 230 | 203 | 67 | 1030 | 42 | 293 | 390 | 218 | 113 |
| FX80  | 612   | 564 | 710 | 24     | 349 | 1135 | 180   | 48 | 790 | 726 | 1030 | 1030 | 940  | 480 | 88 | 230 | 203 | 67 | 1030 | 42 | 293 | 390 | 218 | 113 |
| FX105 | 648   | 600 | 795 | 24     | 342 | 1245 | 180   | 48 | 795 | 726 | 1140 | 1140 | 1050 | 506 | 88 | 230 | 203 | 67 | 1140 | 42 | 293 | 475 | 218 | 113 |
| FX135 | 648   | 600 | 795 | 24     | 342 | 1245 | 180   | 48 | 945 | 876 | 1140 | 1140 | 1050 | 506 | 88 | 230 | 203 | 67 | 1140 | 42 | 293 | 475 | 218 | 113 |
|       | width |     |     | height |     |      | depth |    |     |     |      |      |      |     |    |     |     |    |      |    |     |     |     |     |

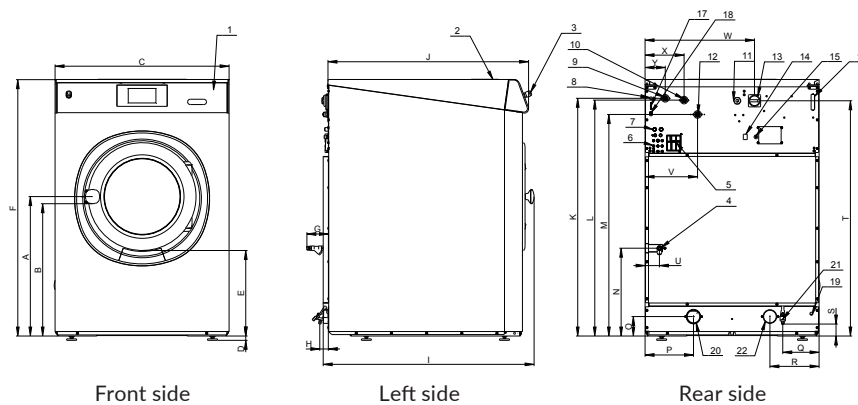

- |                                     |  |  |
|-------------------------------------|--|--|
| 1. Control panel                    | 9. Cold water inlet, soft                  | 17. USB port - optional  |
| 2. Soap dispenser                   | 10. Cold water inlet, hard                 | 18. PC programming connection  |
| 3. Central stop button              | 11. Electrical connection                  | 19. Discharge water cable inlet  |
| 4. Steam connection                 | 12. Hot water inlet                        | 20. Drain valve - 3 in. [76 mm]  |
| 5. Air relieve                      | 13. Main switch                            | 21. Water Sample - 1/2 in. (Applicable for wash bath sample-on request only) |
| 6. Liquid soap connection           | 14. Heating change-over switch             |  |
| 7. Recycle water inlet              | 15. Liquid soap pump electrical connection |  |
| 8. Recycled water valve cable inlet | 16. Fuses                                  |  |